


Scan to email set up for Lexmark

1. Go to web interface by putting the IP address of the printer in your browser.

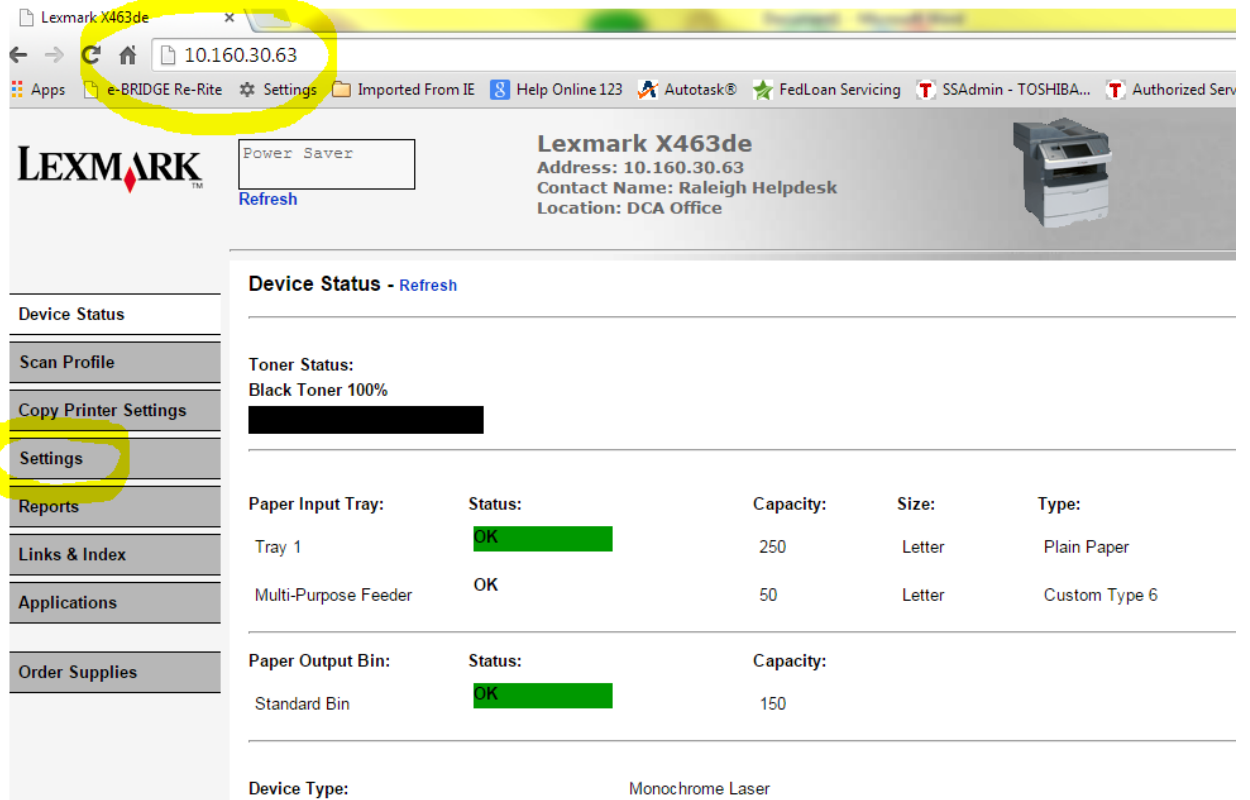

The screenshot shows a web browser window with the address bar containing '10.160.30.63'. The page title is 'Lexmark X463de'. The main content area displays the printer's status and settings. The 'Settings' menu item in the left sidebar is highlighted with a yellow circle. The main content area shows the following information:

LEXMARK Power Saver
Refresh

Lexmark X463de
Address: 10.160.30.63
Contact Name: Raleigh Helpdesk
Location: DCA Office

Device Status - Refresh

Device Status

Scan Profile

Copy Printer Settings

Settings

Reports

Links & Index

Applications

Order Supplies

Toner Status:
Black Toner 100%


| Paper Input Tray: | Status: | Capacity: | Size: | Type: |
|----------------------|---------|-----------|--------|---------------|
| Tray 1 | OK | 250 | Letter | Plain Paper |
| Multi-Purpose Feeder | OK | 50 | Letter | Custom Type 6 |

Paper Output Bin:


| Paper Output Bin: | Status: | Capacity: |
|-------------------|---------|-----------|
| Standard Bin | OK | 150 |

Device Type: Monochrome Laser

2. Click on settings and then e-mail/ftp settings

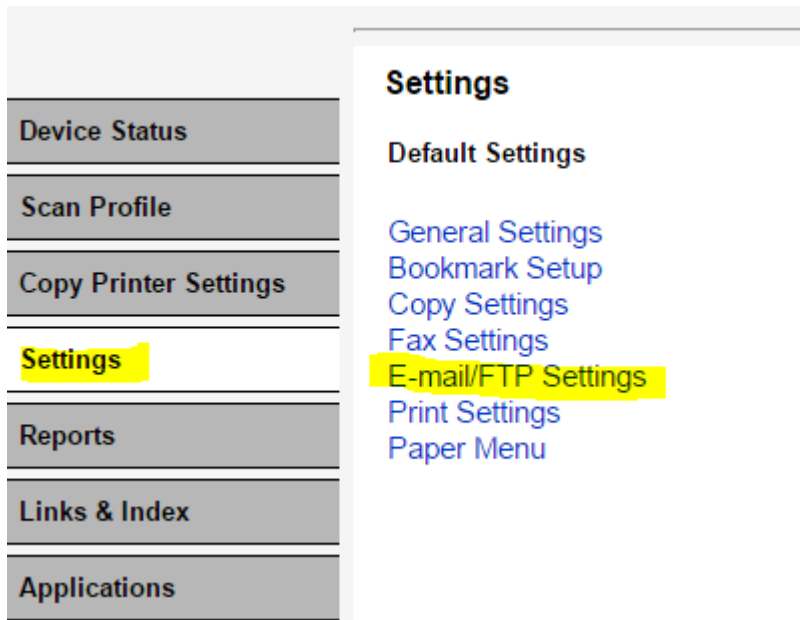

3. Go to SMTP setup

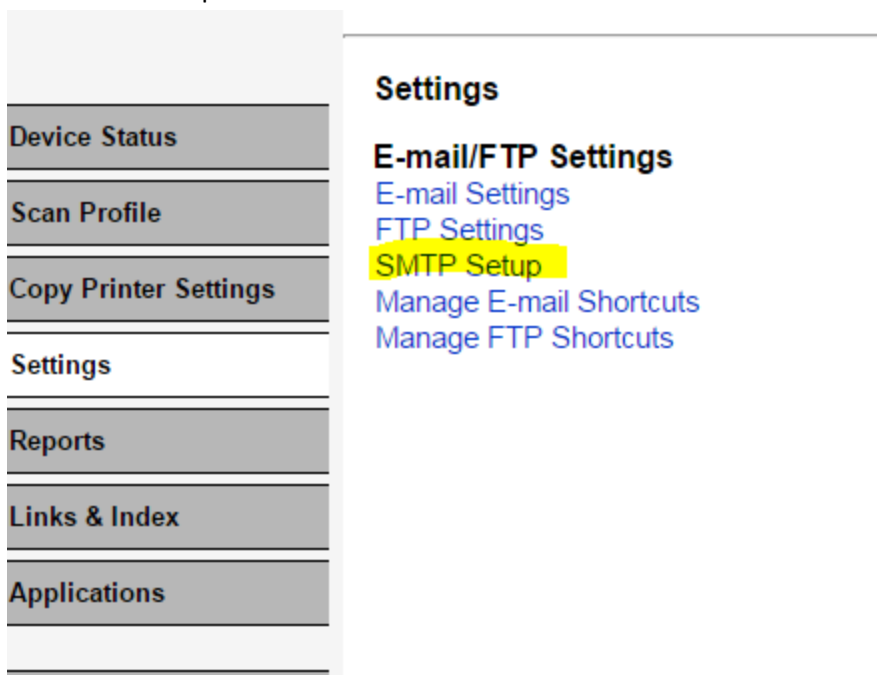

- 4.
5. Set up exactly like below. All highlighted fields

Settings

SMTP Setup

Primary SMTP Gateway Required.

Primary SMTP Gateway Port Default Port: 25 Range: 1-65535

Secondary SMTP Gateway

Secondary SMTP Gateway Port Default Port: 25 Range: 1-65535

SMTP Timeout Range: 5-30 seconds.

Reply Address Example: jsmith@mydomain.com.

Use SSL/TLS

Validate CA

Authentication

SMTP Server Authentication

Device-Initiated E-mail E-Mail Alerts, Fax Forwarding, etc.

User-Initiated E-mail

Device Credentials

Device Userid

Device password

Kerberos 5 REALM Required for some Authentication Types.

6. Password is Toshiba25